

GEOLOGIC CHARACTERIZATION OF LAKE JUANITA AND COWPOND FLAGLER COUNTY, FLORIDA

ACKNOWLEDGEMENTS

The authors would like to express their thanks to the Governing Board of the St. Johns River Water Management District (SJRWMD), and Douglas A. Munch of SJRWMD, for their continuing support of high resolution seismic reflection studies within the District. We also want to thank individual property owners for the generous use of their facilities and personal knowledge of the lakes. We would also like to recognize Dana Wiese (USGS), Shane Dossat (SJRWMD), Scott Harrison (USGS) and Rita Byrd (USGS) technical support.




¹ Center for Coastal Geology and Regional Marine Studies
U.S. Geological Survey
St. Petersburg, FL

² St. Johns River Water Management District
Palatka, FL


By

Jack L. Kindinger¹, Jeffrey B. Davis², and James G. Flocks¹

1996

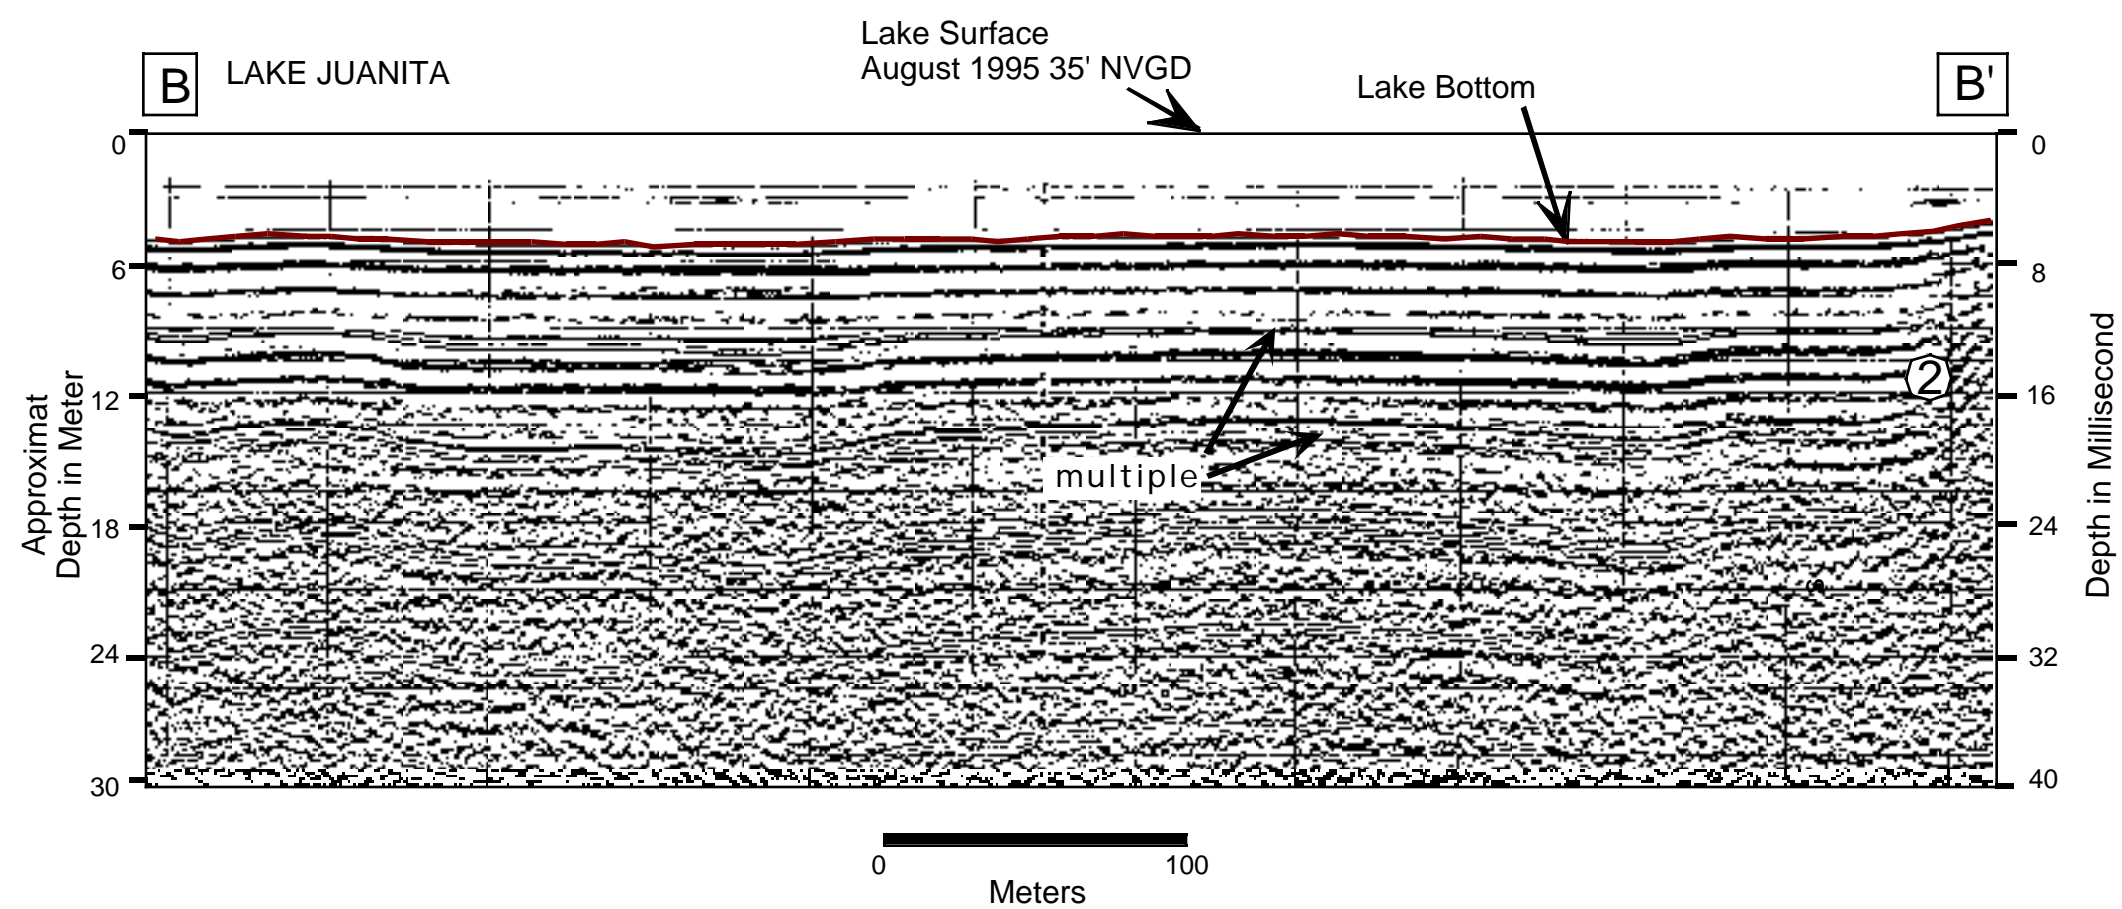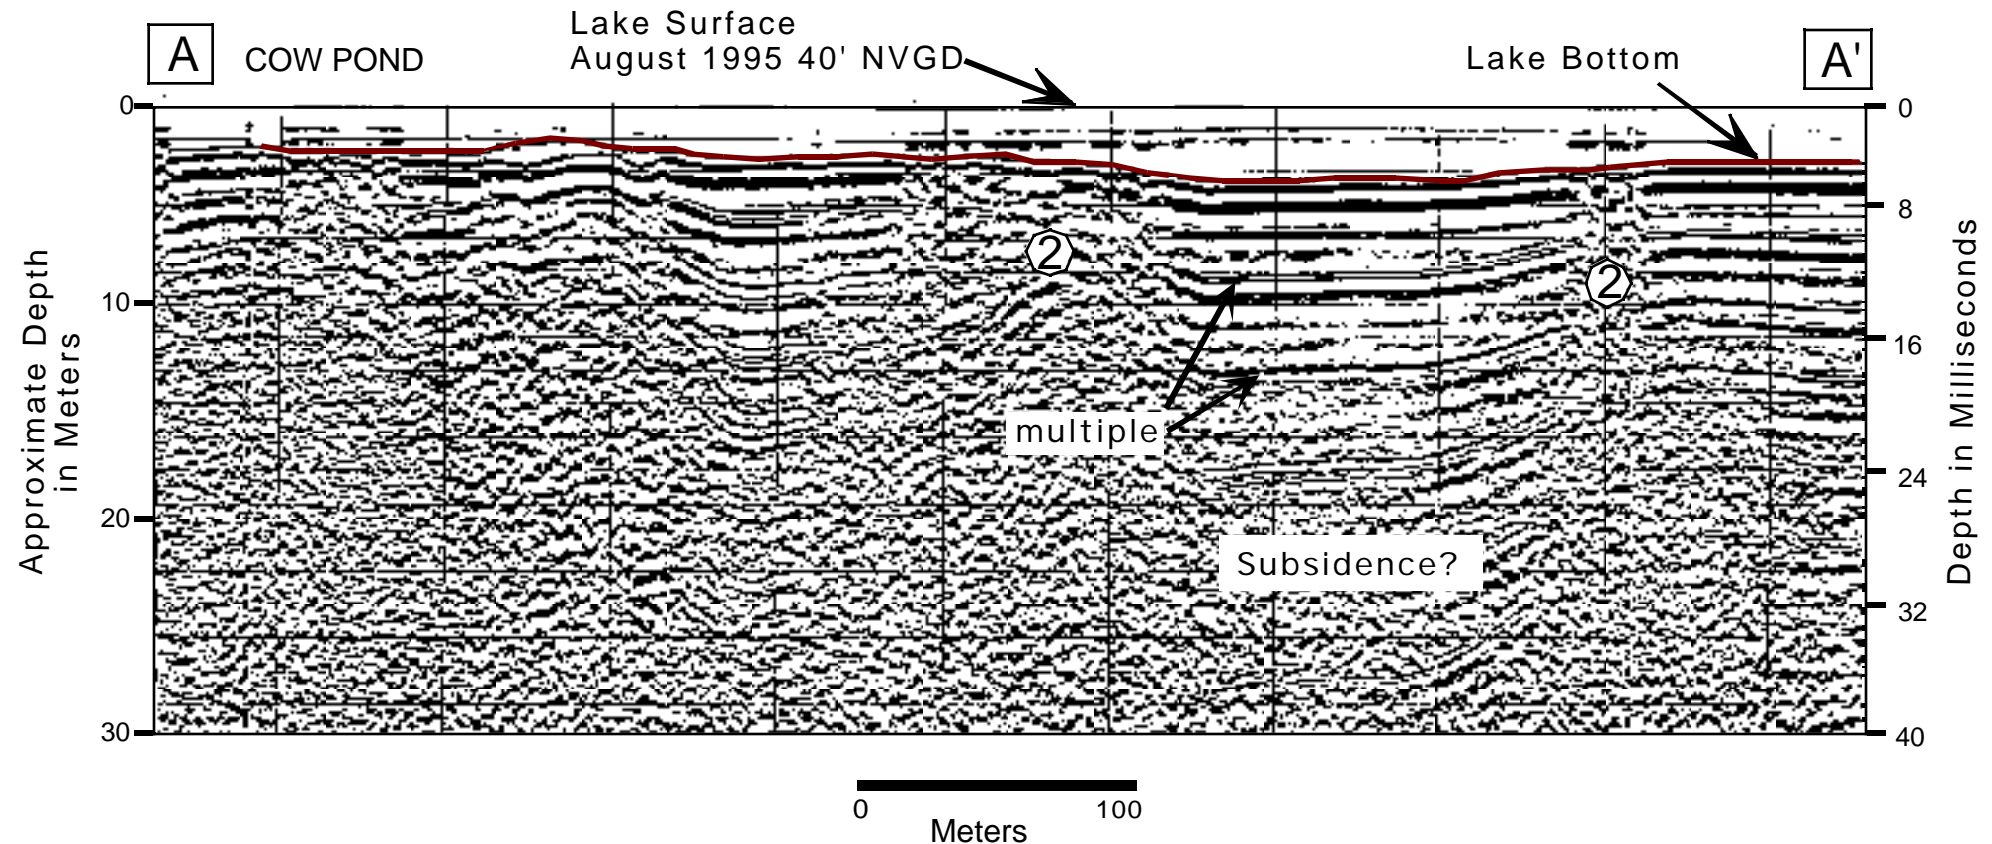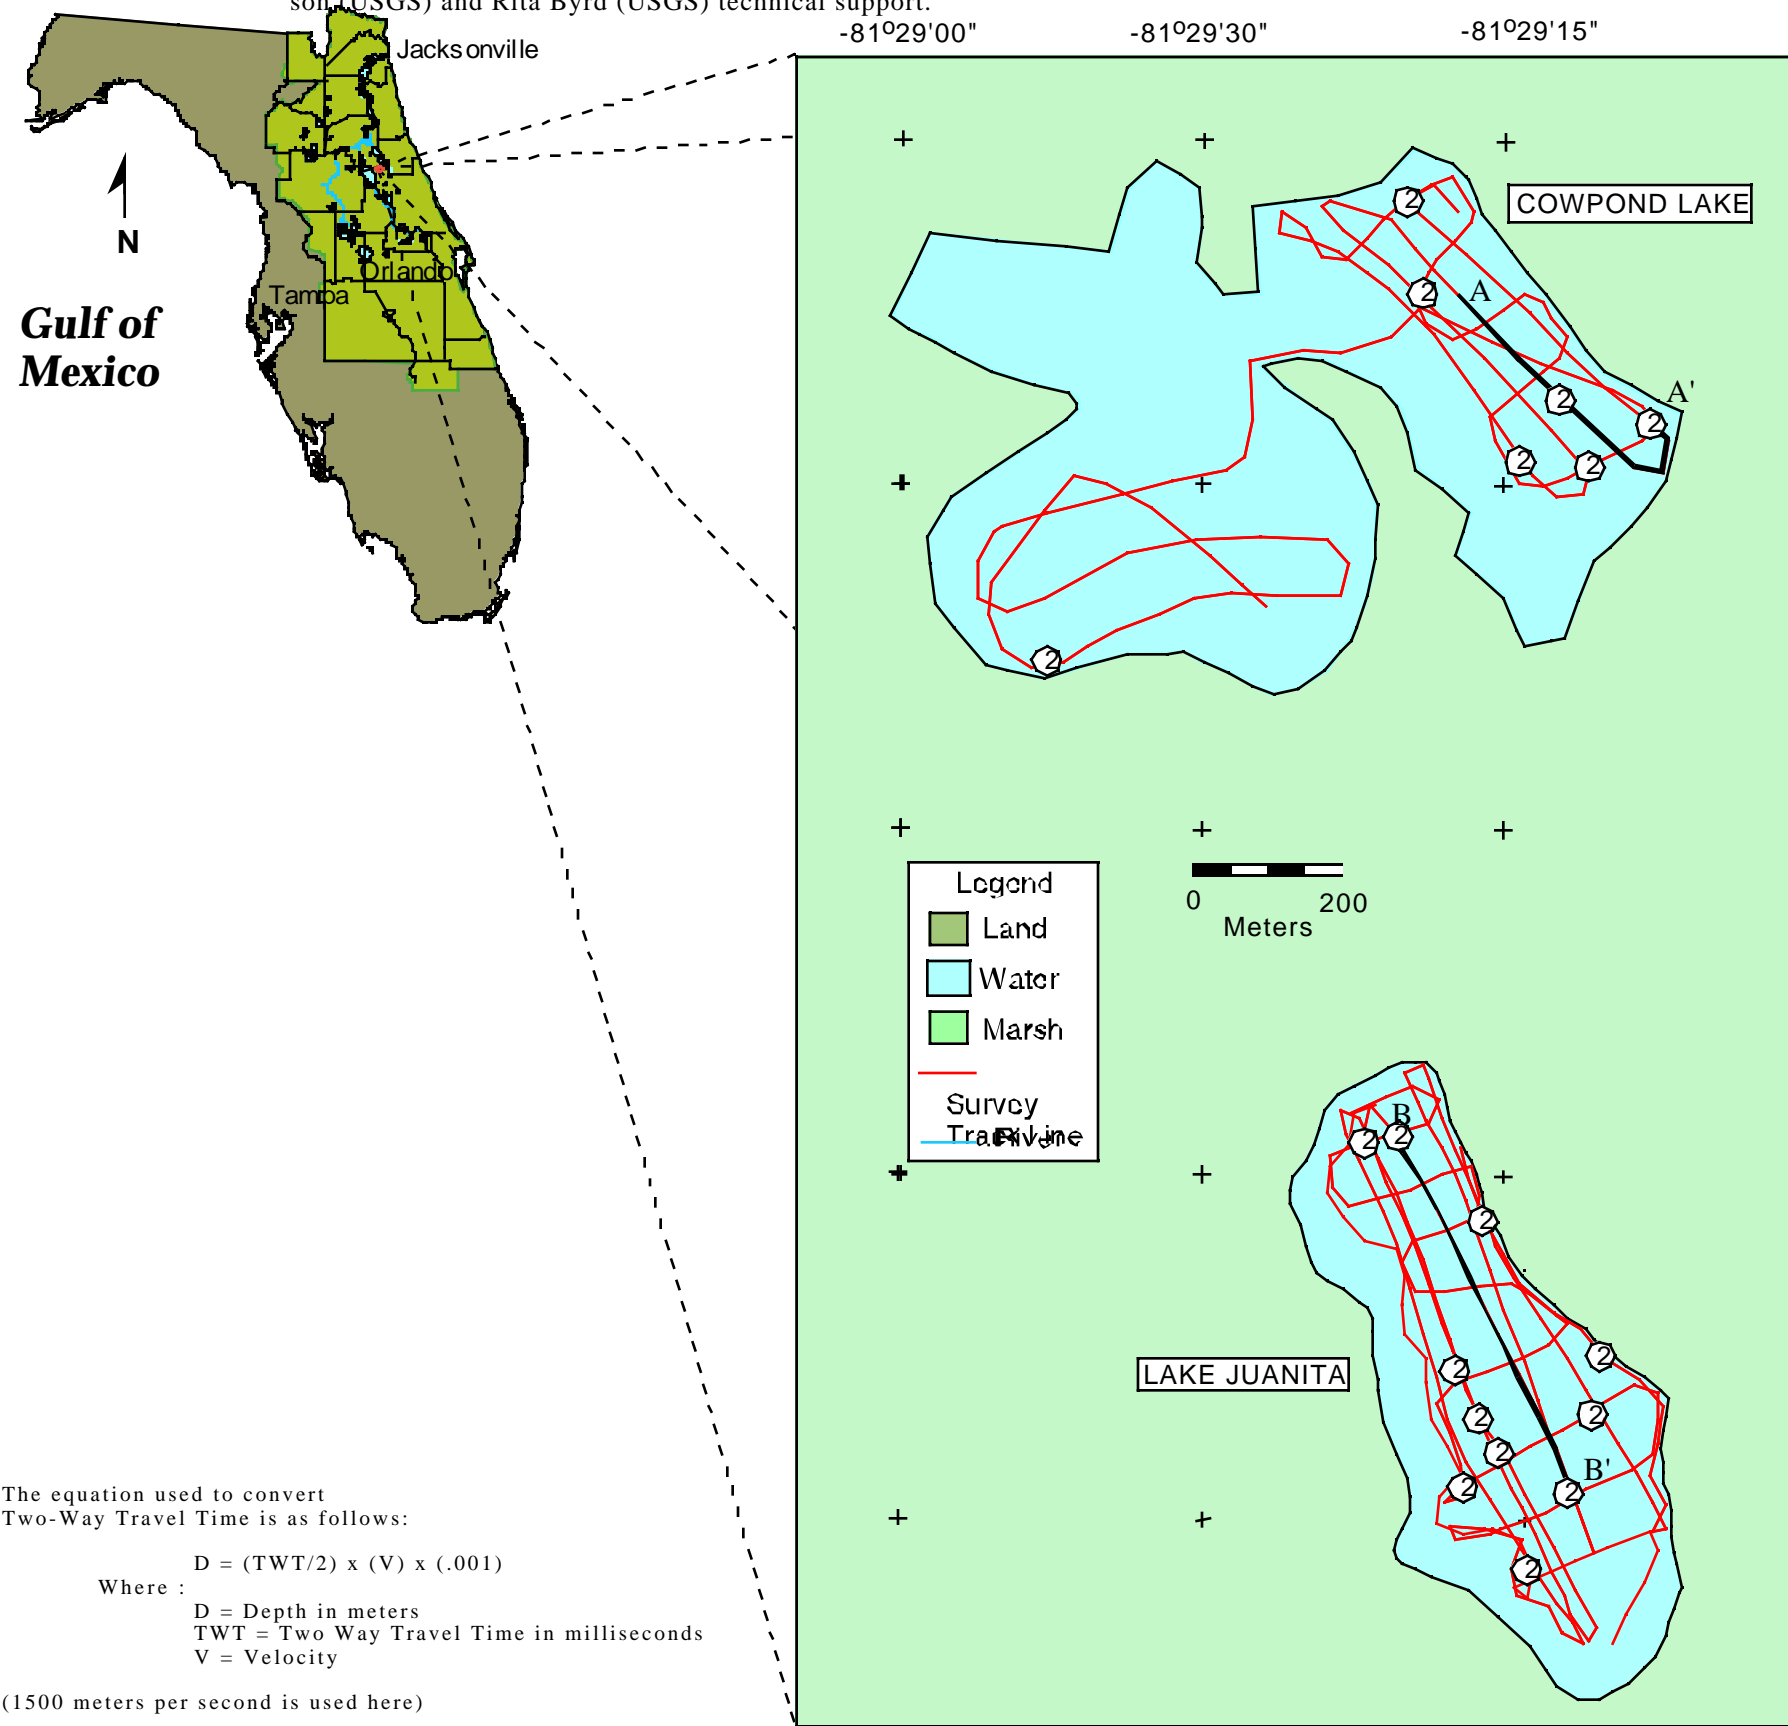

EXPLANATION

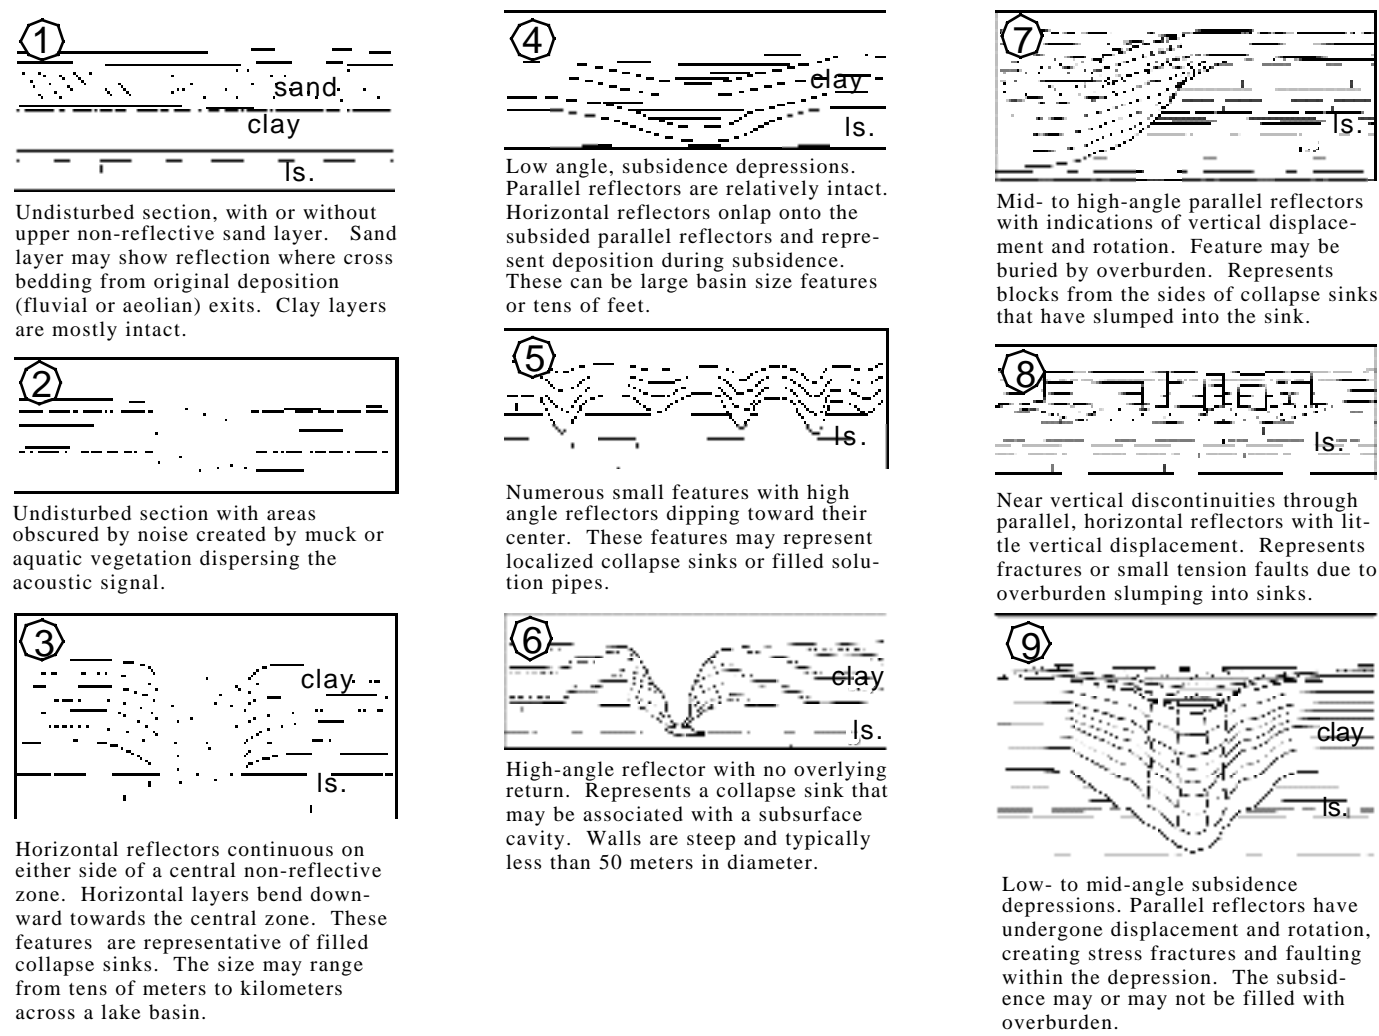

INTRODUCTION

The potential fluid exchange between lakes of northern Florida and the Floridan aquifer and the process by which exchange occurs is of critical concern to the St. Johns River Water Management District (SJRWMD). High-resolution seismic tools with relatively new digital technology were utilized in collecting geophysical data from > 40 lakes and rivers. The data collected shows the application of these techniques in understanding the formation of individual lakes and rivers, thus aiding in the management of these natural resources by identifying breaches or areas where the confining units are thin or absent between the water bodies, the Intermediate aquifer and the Floridan aquifer.

This study was a cooperative investigation conducted from 1993 to 1996 by the SJRWMD and U.S. Geological Survey Center for Coastal Geology (USGS). Since 1989 there have been technical and hardware advances in the digital acquisition of high-resolution seismic data. The primary objective of this cooperative was to test newly developed digital high-resolution single-channel marine seismic continuous-profiling-equipment (HRSP) and apply this technology to identify subbottom features that may enhance leakage from selected lakes and the St. Johns River. The target features include: (1) identifying evidence of breaches or discontinuities in the confining units between the water bodies and the aquifer, and; (2) identifying areas where the confining unit is thin or absent.

METHODS

In cooperation with SJRWMD the USGS acquired and upgraded a digital seismic acquisition system. The Elics Delph2 High-Resolution Seismic System was acquired with proprietary hardware and software running in real time on an Industrial Computer Corp. 486/33 PC. Hard-copy data was displayed on a gray scale thermal plotter. Digital data was stored on a rewritable Magneto-Optical compact disk. Navigation data was collected using a Trimble GPS or PLGR (Rockwell) GPS. GeoLink XDS mapping software was used to display navigation.

The acoustic source was the Huntex Model 4425 Seismic Source Module and a catamaran sled with an electromechanical device. Occasionally, an ORE Geopulse power supply was substituted for the Huntex Model 4425. Power was set at 60 joules or 135 joules depending upon conditions. An Innovative Transducers Inc. ST-5 multi-element hydrophone was used to detect the return acoustical pulse. This pulse was fed directly into the Elics Delph2 system for storage and processing.

Forty-four line-km of HRSP data was collected from Lake Disston. A velocity of 1500 meters per second (m/s) was used to calculate a depth scale for the seismic profiles. Measured site specific velocity data is not available for these sites.

These surveys were conducted in part to test the effectiveness of shallow-water marine geophysical techniques in the freshwater lakes of central Florida. Acquisition techniques were similar but modifications were necessary. Data quality varied from good to poor with different areas and varying conditions. As acquisition techniques improved so did data quality in general. In many areas an acoustic multiple masked much of the shallow geologic data.

Physiography

Lake Disston is in the extreme southwestern corner of Flagler County, Florida. The lake is located east of the southern tip of the Crescent City Ridge and northwest of the northern tip of the Deland Ridge. It is part of the Pamlico Terrace. Lake elevation at the time of the seismic survey was ~4.26 m (14 ft) NVGD. Lake Disston is oval shaped ~ 4.2 x 2.4 km with a of perimeter 28 km and the surface area 45.6 sq km. Average water depth during the survey was 1.5 to 1.8 m (5 - 6 ft). The lake is surrounded by a plain with ~20 ft average elevation and bordered on the north by marsh associated with Little Haw Creek and woodland to the south.

GEOLOGIC CHARACTERIZATION

Lake Disston is characterized by several seismic reflections. The subsidence to the east is a category 3 seismic character (Profile A-A'; Contour Maps; and Explanation), while the western part of the lake has several combined categories 3 and 9 (3.9). The 3.9 are small individual depressions described as fractured above and nonreflective below. Profile B-B' is an example of 4.9 with infill above and fracture below. Subsurface Profile C-C' shows that the large subsidence has had continuous filling with slower subsidence, allowing the depression to infill.

Logs from wells in the area have shown the depth to the top of the Ocala Limestone to be -9 to -18 m (-30 to -60 ft) NVGD. Not knowing the actual velocities of the substrate has not allowed us to absolutely pick this reflector. Using the geometry of the units from the seismic profiles we have identified the confining layer (Hawthorn Group?) and the top of the limestone (Ocala Limestone?), Profile B-B'.



The U.S. Geological Survey, in cooperation with the St. Johns River Water Management District, prepares this information "as is" for its own purposes and this information may not be suitable for other purposes. This map has not been reviewed for conformity with U.S. Geological Survey editorial standards.